




**Exteriérové
svietidlá**



Outdoor lighting



STONE S 10579

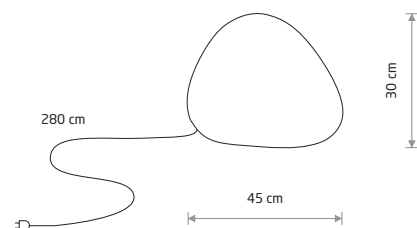

STONE S

plastic PE

10579




1xE27, max 25W only LED

IP44



STONE M 10580

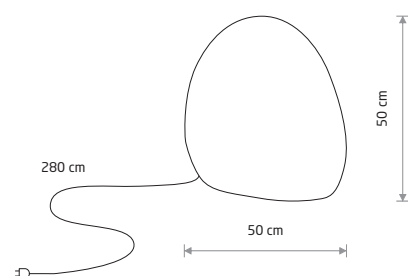

STONE M

plastic PE

10580




1xE27, max 25W only LED

IP44



STONE L 10581

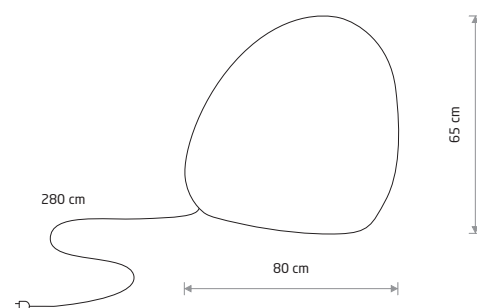

STONE L

plastic PE

10581




1xE27, max 25W only LED


IP44

WHITE



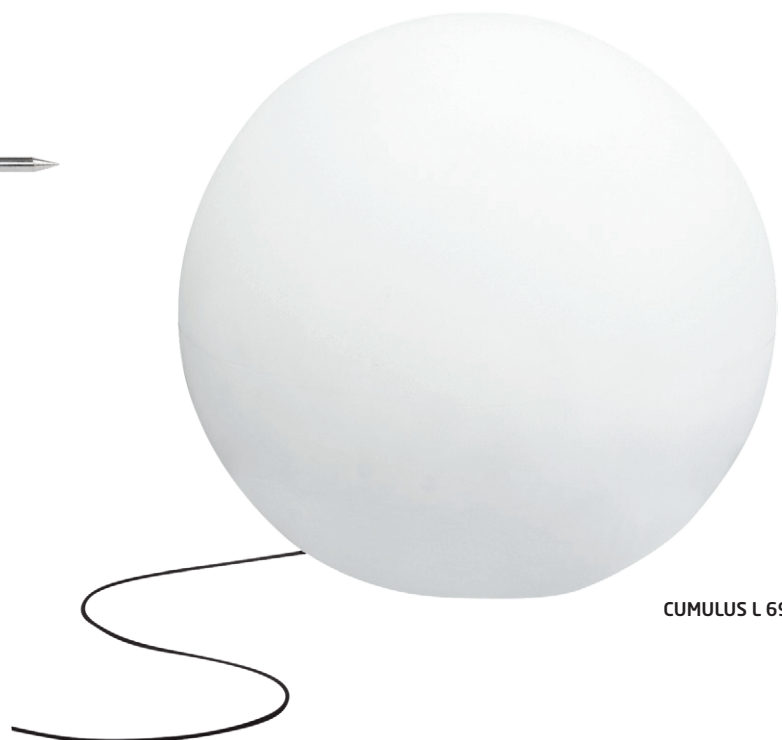

CUMULUS L 6978




CUMULUS S

plastic PE

6976

1xE27, max 25W only LED

IP44

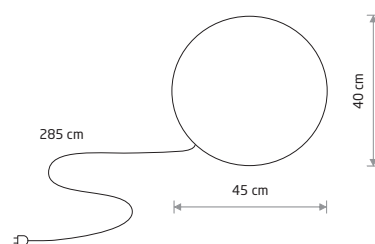


CUMULUS M

plastic PE

6977

1xE27, max 25W only LED

IP44

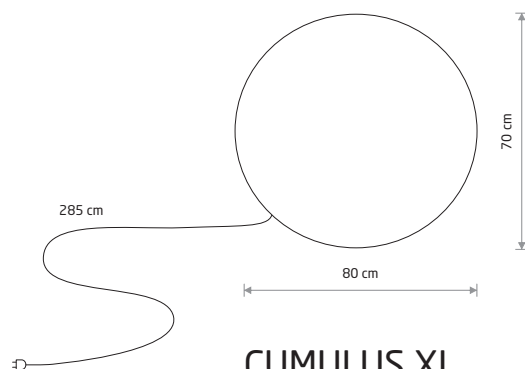


CUMULUS XL

plastic PE

9714

1xE27, max 25W only LED

IP44

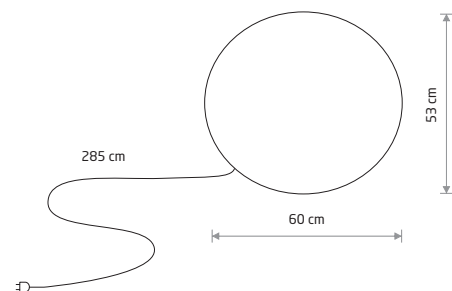


CUMULUS L

plastic PE

6978

1xE27, max 25W only LED


IP44

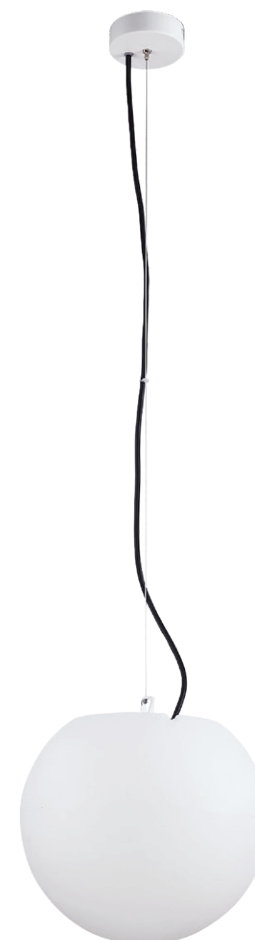

CUMULUS S 9751



CUMULUS M 9715




CUMULUS S

plastic PE, painted steel

9751

1xE27, max 25W only LED

IP65




CUMULUS M

plastic PE, painted steel

9715

1xE27, max 25W only LED

IP65



CUMULUS L

plastic PE, painted steel


9607

1xE27, max 25W only LED


IP65




FLOWERPOT S 9711

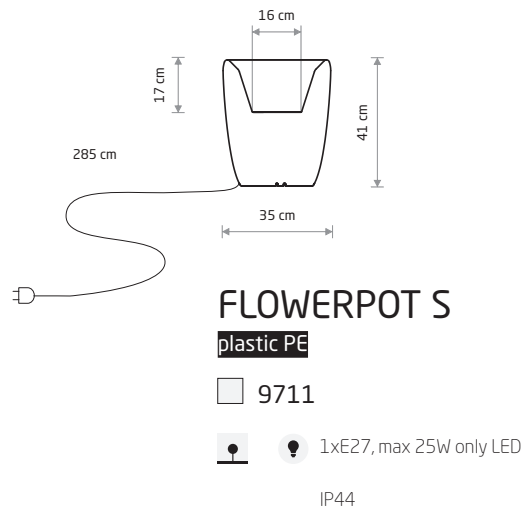

FLOWERPOT M 9712

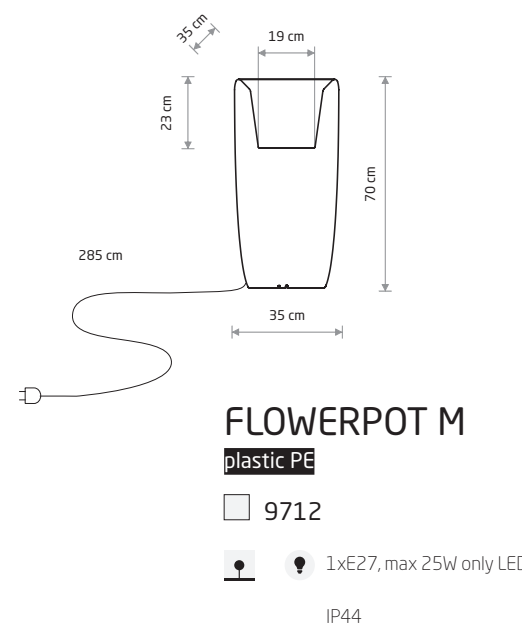

FLOWERPOT L 9713

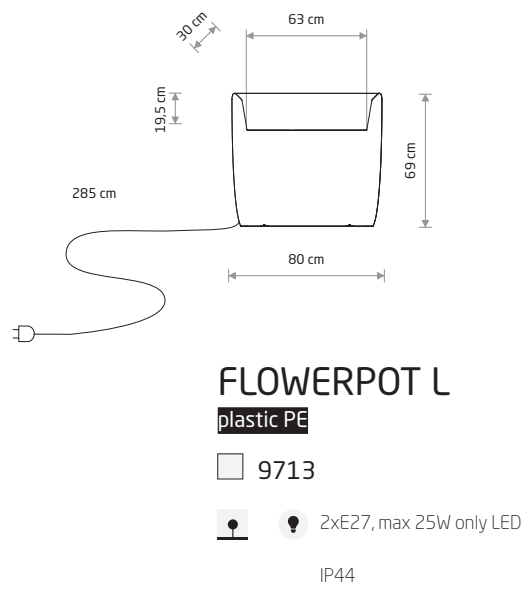


FLOWERPOT S 9711

FLOWERPOT M 9712

FLOWERPOT S 9711



CUMULUS CUBE M 8966

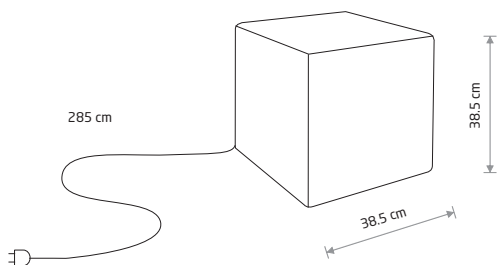


CUMULUS CUBE M
plastic PE

8966

1xE27, max 25W only LED
IP44




CUMULUS CUBE L 8965

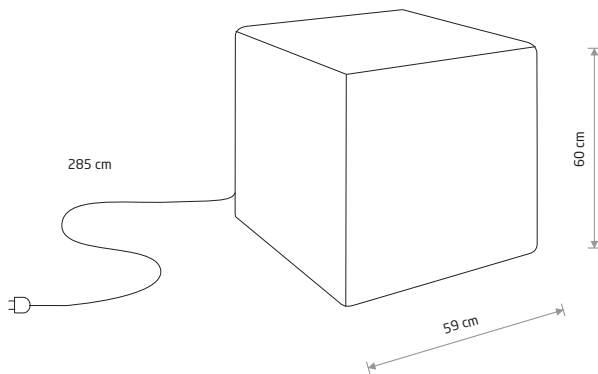

CUMULUS CUBE L
plastic PE

8965

1xE27, max 25W only LED
IP44




STAR
plastic PE

9426

1xE27, max 25W only LED
IP44



STAR 9426

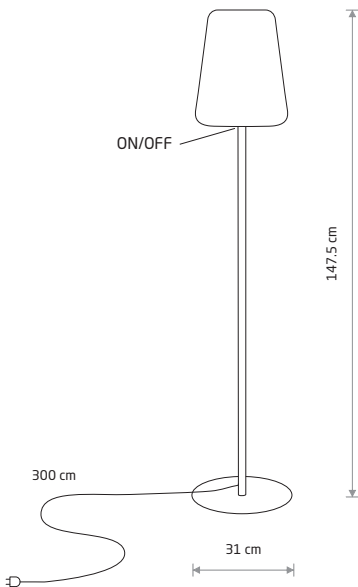

PATIO
painted steel, plastic LLDPE

10105

1xE27, max 25W only LED
IP44




PATIO 10105






ZOLA LED 11546


ZOLA LED 11545

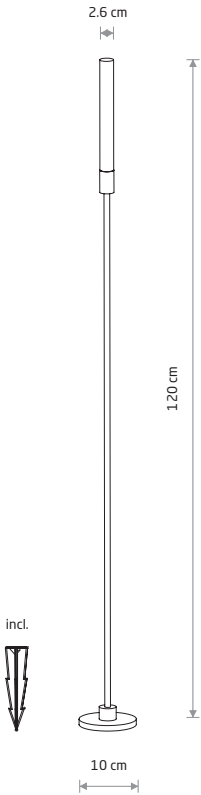

ZOLA LED
painted aluminum, plastic PC
■ 11546
●

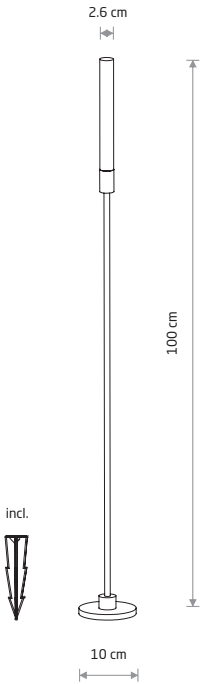

ZOLA LED
painted aluminum, plastic PC
■ 11545
●

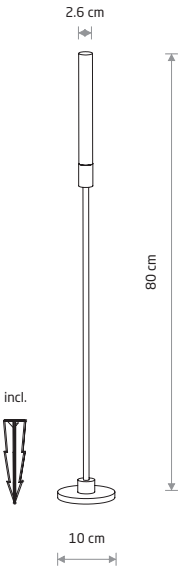


ZOLA LED
painted aluminum, plastic PC
■ 11544
●

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	VOLTAGE DC	Safety type	Ingress protection	Lifetime
11544	3W LED	3000K	100 lm	360 °	>90	24V	III	IP54	30000h
11545	3W LED	3000K	100 lm	360 °	>90	24V	III	IP54	30000h
11546	3W LED	3000K	100 lm	360 °	>90	24V	III	IP54	30000h




RUBY LED 11542

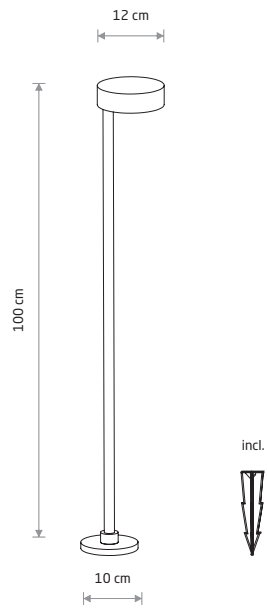

RUBY LED
painted aluminum, plastic PC
■ 11542
●



TESSA LED 11541

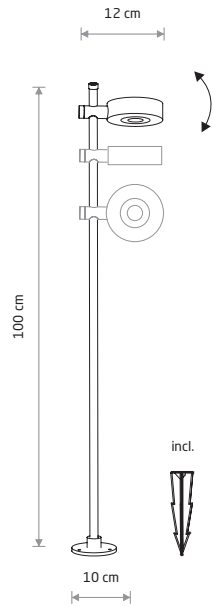


TESSA LED
painted aluminum, plastic PC
■ 11541
●

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11542	7W LED	3000K	400 lm	24 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11541	7W LED	3000K	400 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h



LIV LED 11538

Visualisation by Iwona Ligęza



LIV LED
painted aluminum, plastic PC
■ 11538
●

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11538	6W LED	3000K	200 lm	20 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h



MIA LED M
11374

MIA LED M
painted aluminum, plastic PC

11374



MIA LED L
11375

MIA LED L
painted aluminum, plastic PC

11375



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11374	30W LED	3000K	2500 lm	70 °	>80	~220-230 V, 50/60 Hz	⚡	>0.9	IP54	30000h
11375	100W LED	3000K	7800 lm	70 °	>80	~220-230 V, 50/60 Hz	⚡	>0.9	IP54	30000h

BLACK


IDA
painted aluminum, glass

11371



1xE27, max 10W LED

IP44



IDA
11371




IDA
painted aluminum, glass

11372



2xE27, max 10W LED

IP44

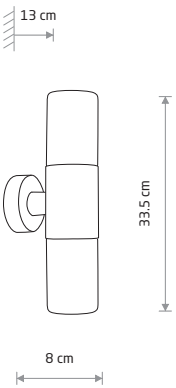

IDA
11372




IDA
painted aluminum, glass

11373



1xE27, max 10W LED


IP44




IDA
11373



BLACK

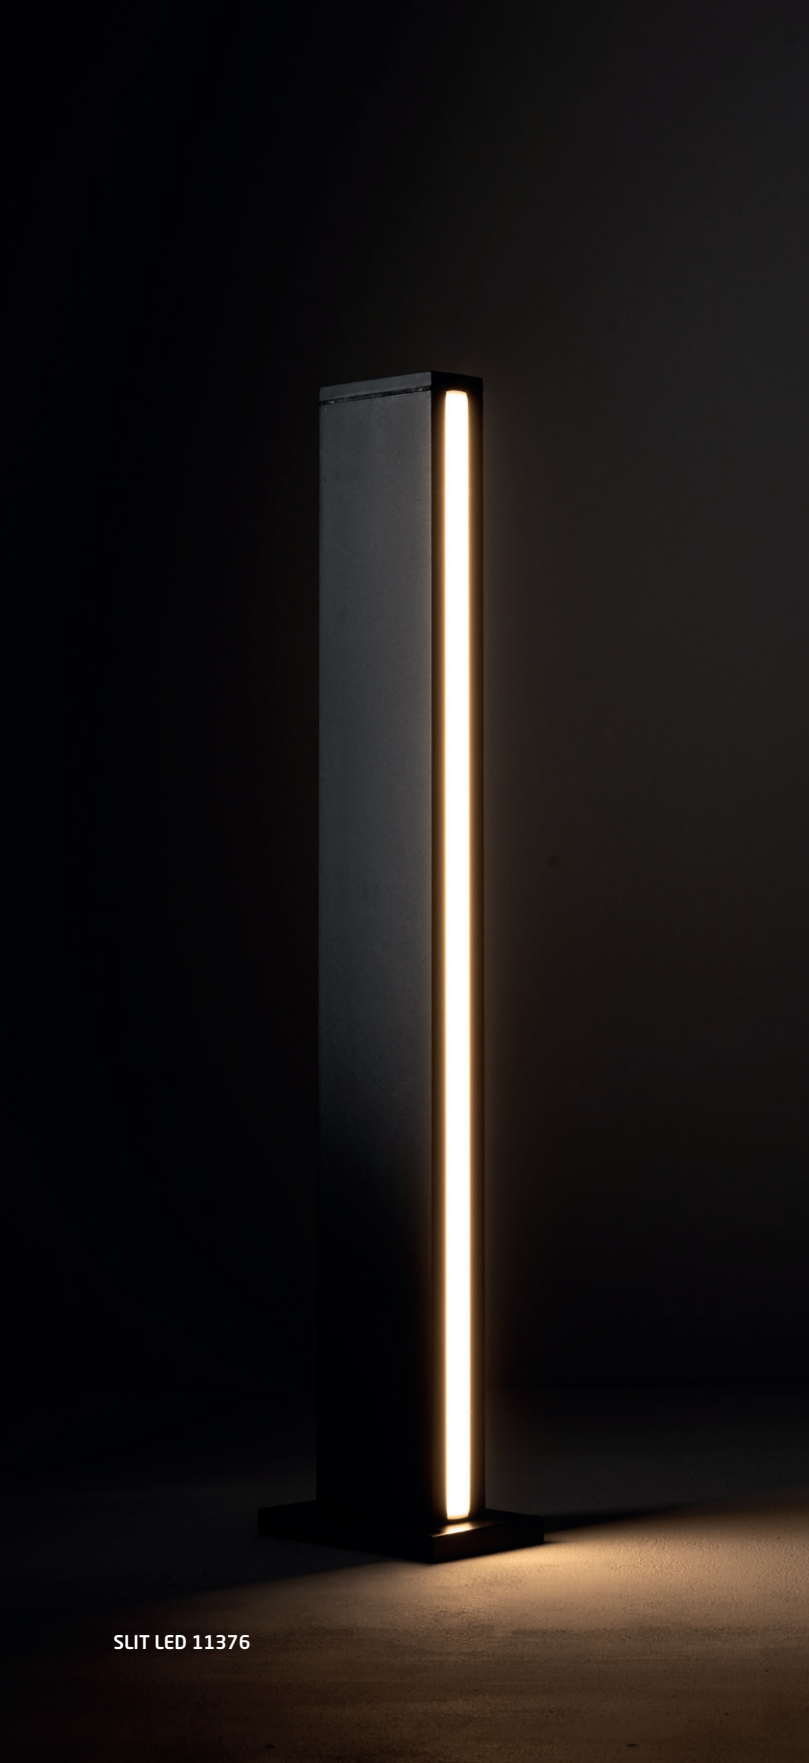

SLIT LED 11376

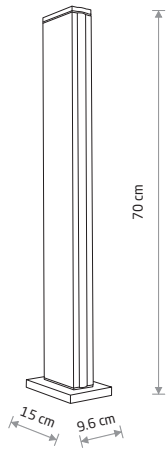


SLIT LED
painted aluminum, plastic PC
■ 11376



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11376	12W LED	3000K	600 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h

■ BLACK


SLIM LED
painted aluminum, plastic PC
■ 11540

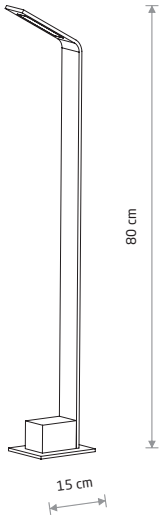


SLIM LED 11540



LHOTSE LED
painted aluminum, plastic PC
■ 4448

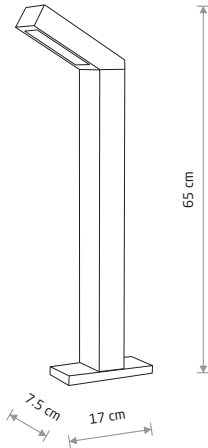


LHOTSE LED 4448

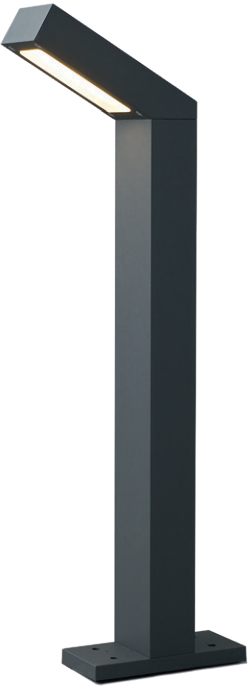

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11540	7W LED	3000K	450 lm	120 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
4448	9W LED	3000K	169 lm	70 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h

■ BLACK

■ GRAPHITE



STRUCTURE LED

painting aluminum, plastic PC

8146




STRUCTURE LED 8146


SYMMETRY LED

painting aluminum, plastic PC

8176



SYMMETRY LED 8176

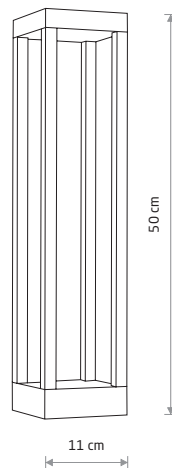

STRUCTURE LED

painting aluminum, plastic PC

8145




STRUCTURE LED 8145

SYMMETRY LED

painting aluminum, plastic PC

8180

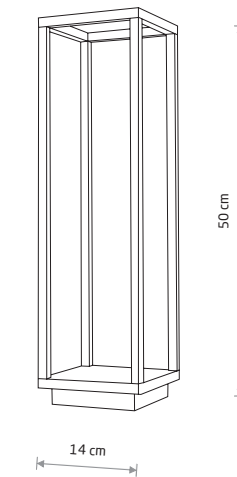


SYMMETRY LED 8180

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8145	13W LED	3000K	820 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h
8146	13W LED	3000K	820 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8176	7W LED	3000K	210 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h
8180	7W LED	3000K	380 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h




TEPIC LED 9508



TEPIC LED
painted aluminum
■ 9508





MONTERREY LED 9507



MONTERREY LED
painted aluminum
■ 9507



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9508	9W LED	3000K	395 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h
9507	9W LED	3000K	410 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h

THIKA LED B
painted aluminum, glass
■ 9120

THIKA LED B 9120

THIKA LED
painted aluminum, glass
■ 9118

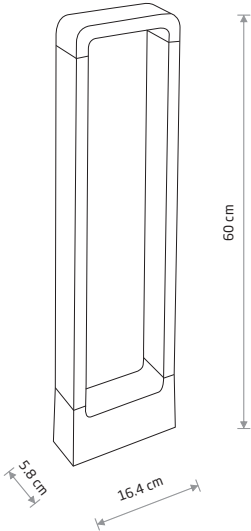



THIKA LED 9118

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9118	9W LED	3000K	550 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
9120	15W LED	3000K	1200 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h




POLE LED 9185

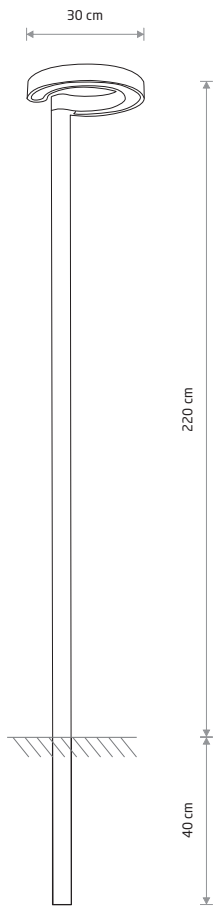

POLE LED
painted aluminum, plastic PC
9185




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9185	15W LED	3000K	1000 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h

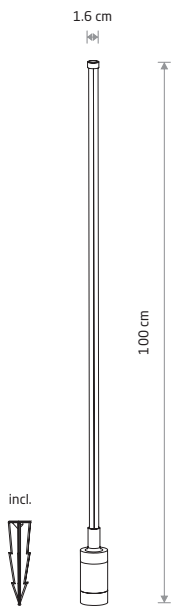

ZURI LED
painted aluminum, plastic PC
11547




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11547	12W LED	3000K	850 lm	120 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

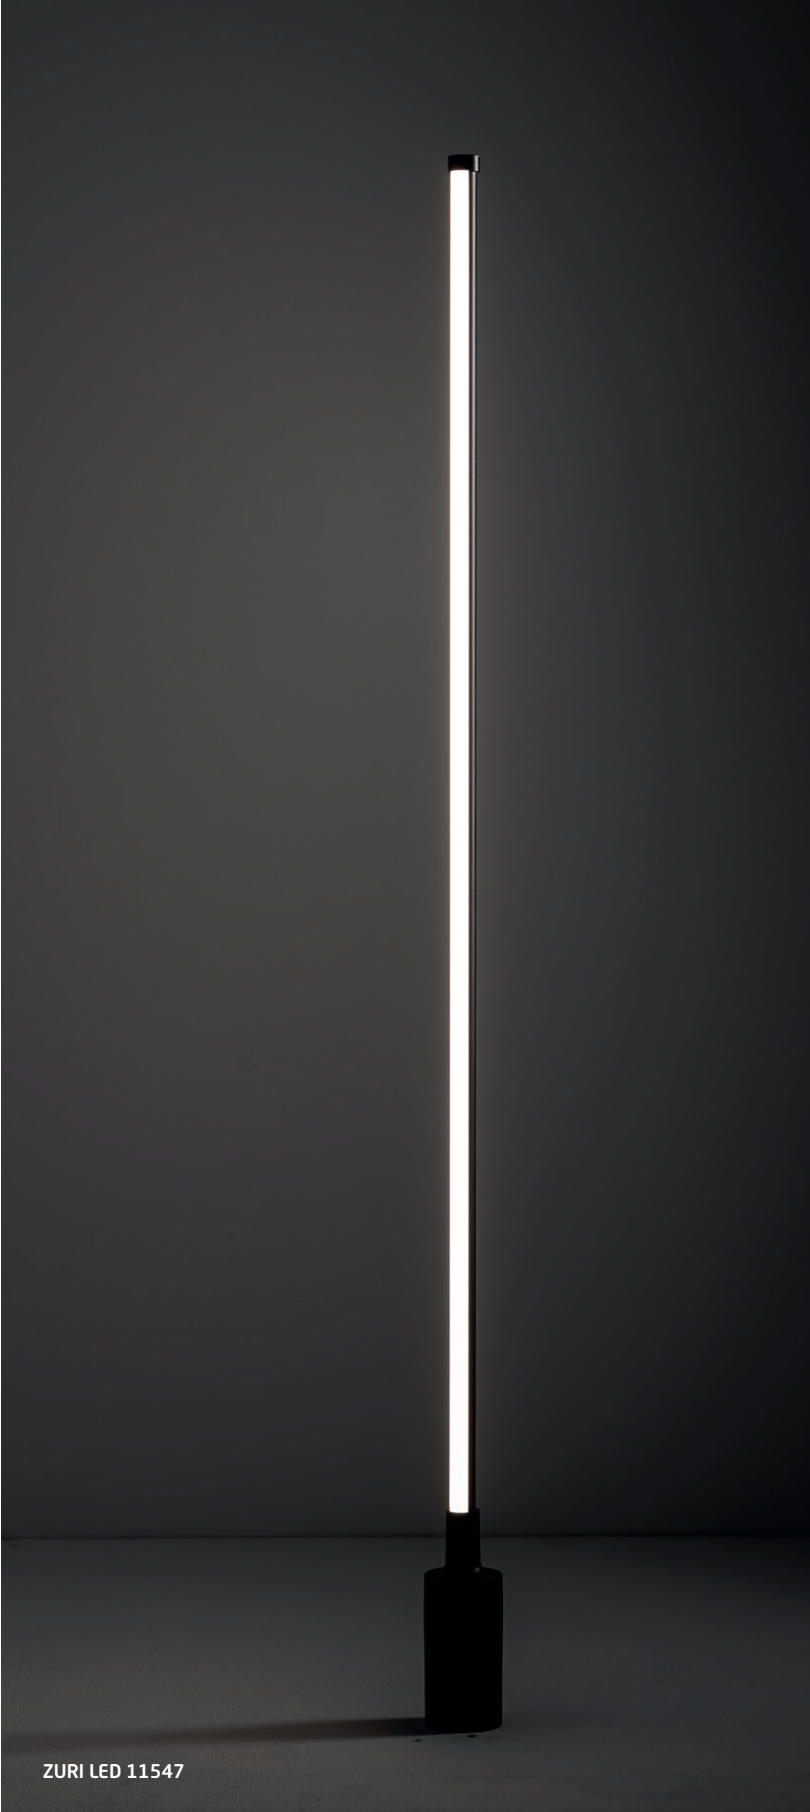

ZURI LED 11547



OTTAWA 9562

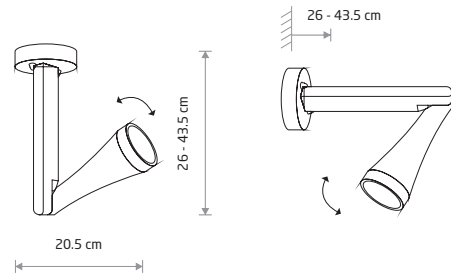


OTTAWA

■ painted aluminum, glass

■ 9562

■ 1xGU10 R50, max 10W only LED

IP44



SOUL

■ painted aluminum, glass

■ 9555

■ 1xGU10 R50, max 10W only LED


IP44



SOUL 9555



OTTAWA 9561




OTTAWA

■ painted aluminum, glass

■ 9561

■ 1xGU10 R50, max 10W only LED

IP44

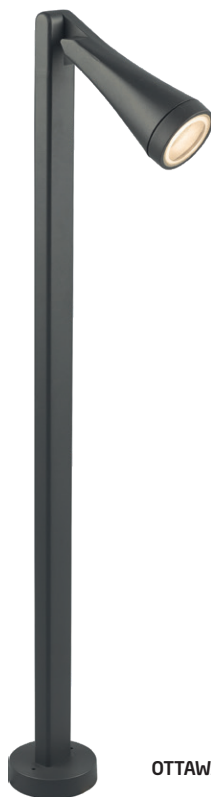

OTTAWA 9563




OTTAWA

■ painted aluminum, glass

■ 9563

■ 1xGU10 R50, max 10W only LED

IP44

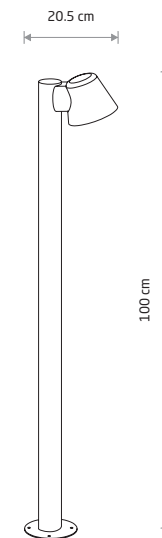

SOUL

■ painted aluminum, glass

■ 9557

■ 1xGU10 R50, max 10W only LED


IP44



SOUL 9557



NORIN 4446

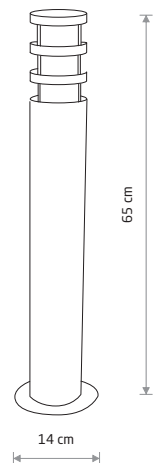

NORIN

■ painted aluminum, glass

■ 4446

● 1xE27, max 10W only LED

IP44

TUBINGS S 8160



TUBINGS M 8161




TUBINGS 8158



OUTDOOR LIGHTING



HORN 4906

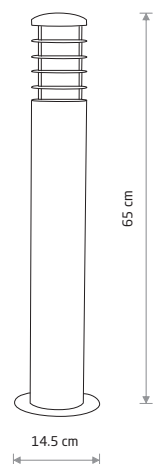


HORN

■ painted aluminum, glass

■ 4906

● 1xE27, max 10W only LED

IP44




TUBINGS S

■ painted aluminum, glass

■ 8160

● 1xGU10 R50, max 10W only LED

IP54




TUBINGS M

■ painted aluminum, glass, plastic

■ 8161

● 1xGU10 R50, max 10W only LED

IP54

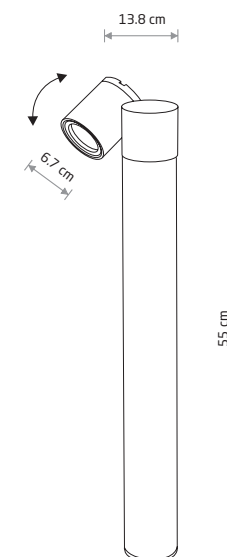


TUBINGS

■ painted aluminum, glass


■ 8158

● 1xGU10 R50, max 10W only LED

IP54

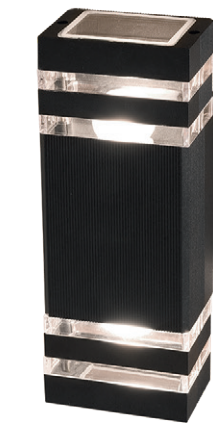

RIO 4424



RIO

■ painted aluminum, plastic PC

■ 4424



💡 2xE27, max 10W only LED

IP54

OIR


■ painted aluminum, plastic PC

■ 9158



💡 1xE27, max 10W only LED


IP44

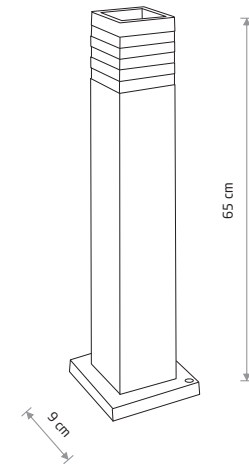

OIR 9158



RIO SENSOR 7017



RIO


■ painted aluminum, plastic PC

■ 4423



💡 1xE27, max 10W only LED

IP54



RIO SENSOR

■ painted aluminum, plastic PC

■ 7017



💡 1xE27, max 10W only LED

IP54

RIO SENSOR


■ painted aluminum, plastic PC

■ 9097



💡 1xE27, max 10W only LED

IP54

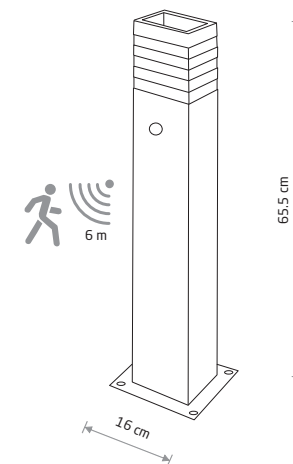


RIO SENSOR 9097






MEKONG 4418



MEKONG
painted aluminum, glass
■ 4418
1xE27, max 10W only LED
IP42




MEKONG 4420




MEKONG
painted aluminum, glass
■ 4420
2xE27, max 10W only LED
IP42




MEKONG 4698

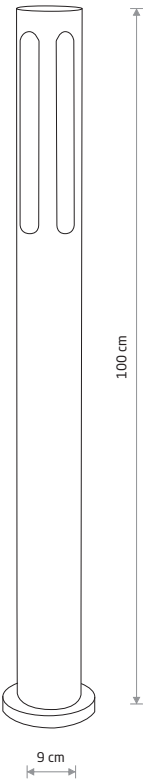

MEKONG
painted aluminum, glass
■ 4698
1xE27, max 10W only LED
IP42

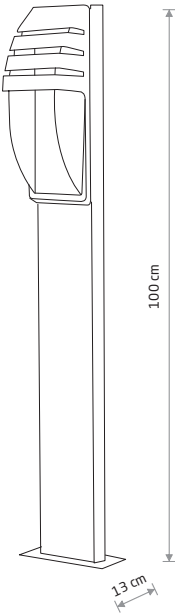

MISTRAL
painted aluminum, plastic PC
■ 3394
1xE27, max 10W only LED
IP44

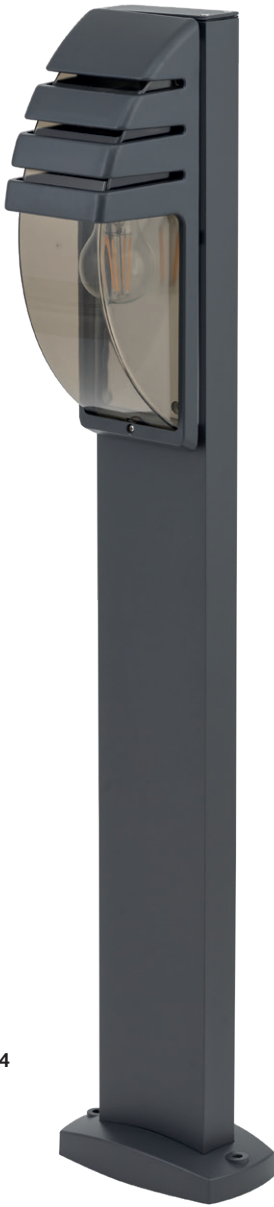

MISTRAL 3394




PATHWAY LED PRO 10283

PATHWAY LED PRO

painted steel, painted aluminum, plastic


■ 10283 3000K ■ 10633 4000K



PATHWAY FOUNDATION KIT

steel


■ 8795



PATHWAY LED S

painted steel, painted aluminum, plastic


■ 9420

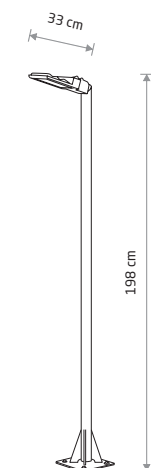

PATHWAY LED M

painted steel, painted aluminum, plastic

■ 9252

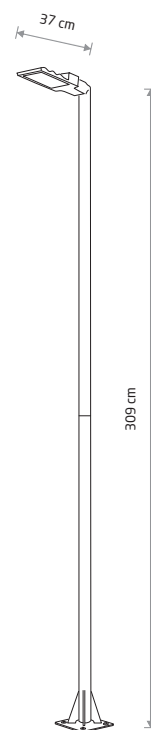

PATHWAY LED L

painted steel, painted aluminum, plastic

■ 9125



PATHWAY LED S 9420



PATHWAY LED M 9252

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10283	60W LED	3000K	5700 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
10633	60W LED	4000K	5900 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protect	Lifetime
9420	24W LED	3000K	2200 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9252	24W LED	3000K	2200 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9125	36W LED	3000K	3600 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h

■ SILVER ■ BLACK P013 RAL 9005


■ BLACK P013 RAL 9005

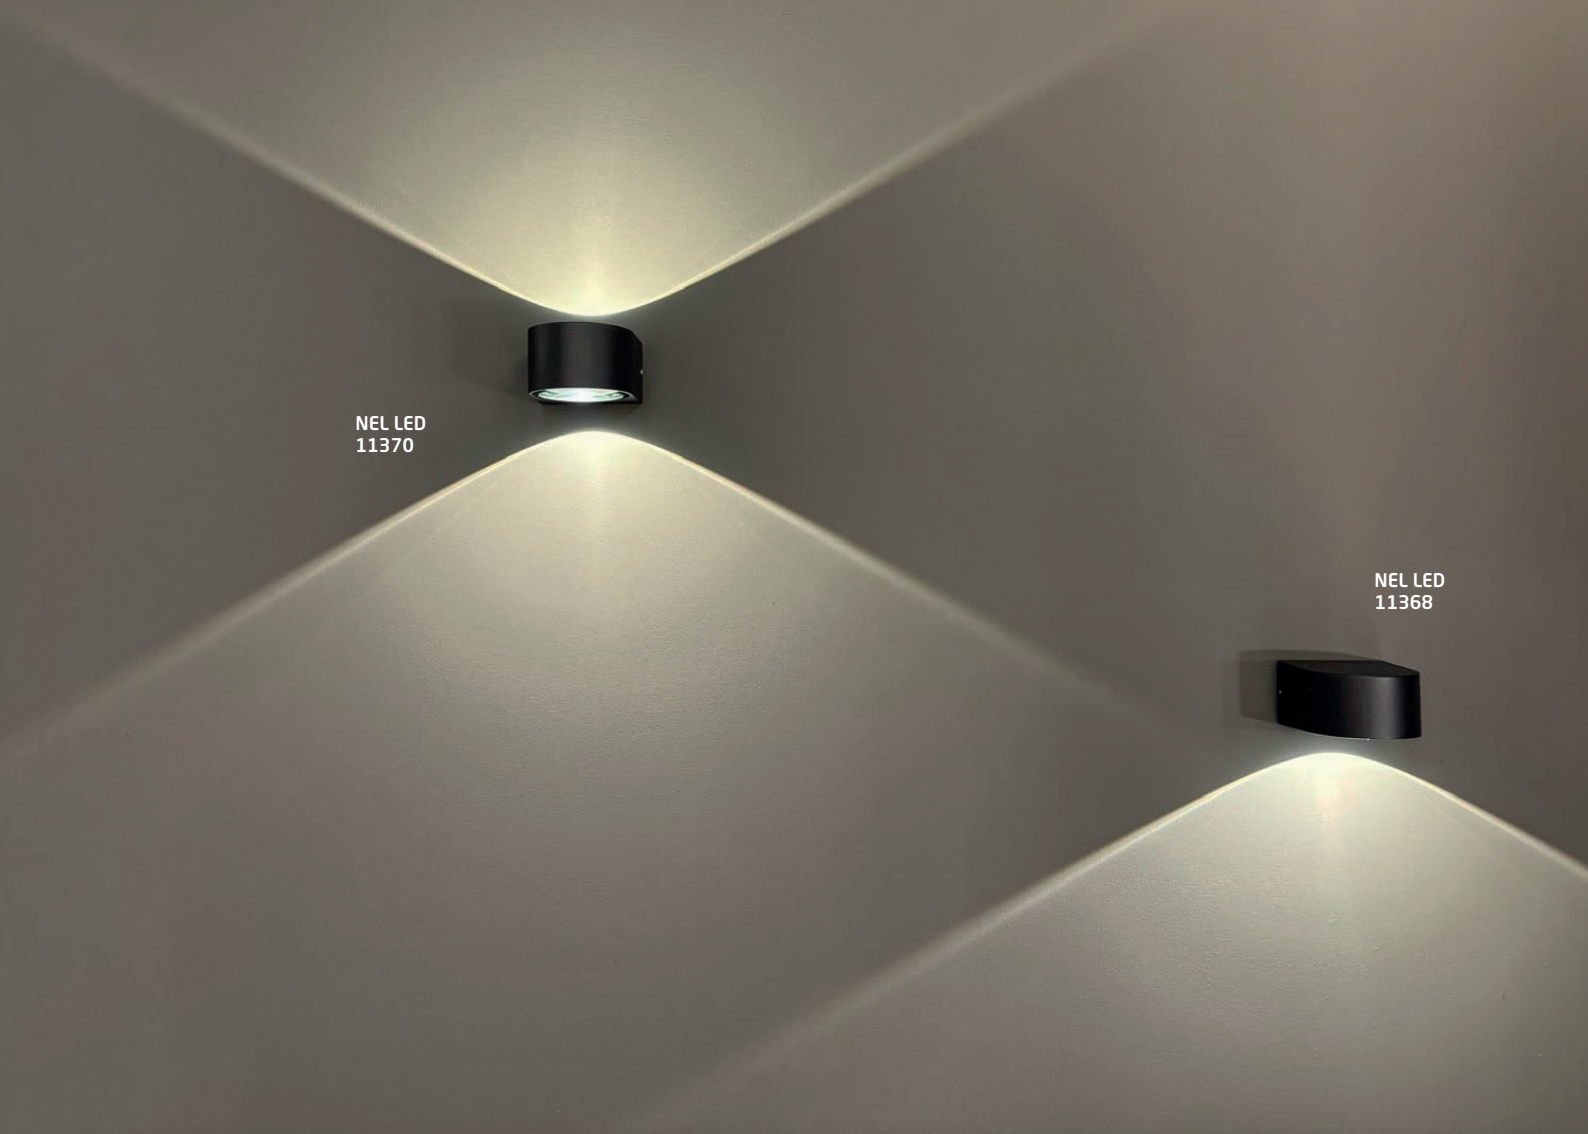

NEL LED

painted aluminum, glass

11368



NEL LED

painted aluminum, glass

11370



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11368	5W LED	3000K	500 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11370	2x5W LED	3000K	880 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h



ORLA LED S

painted aluminum, plastic PC

11548 11551



ORLA LED M


painted aluminum, plastic PC

11550 11552



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11548	12W LED	3000K	750 lm	120°	>90	~220-230V V, 50/60 Hz	⊕	>0.7	IP54	30000h
11550	20W LED	3000K	1300 lm	120°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11551	12W LED	3000K	750 lm	120°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11552	20W LED	3000K	1300 lm	120°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

ORLA LED M 11552


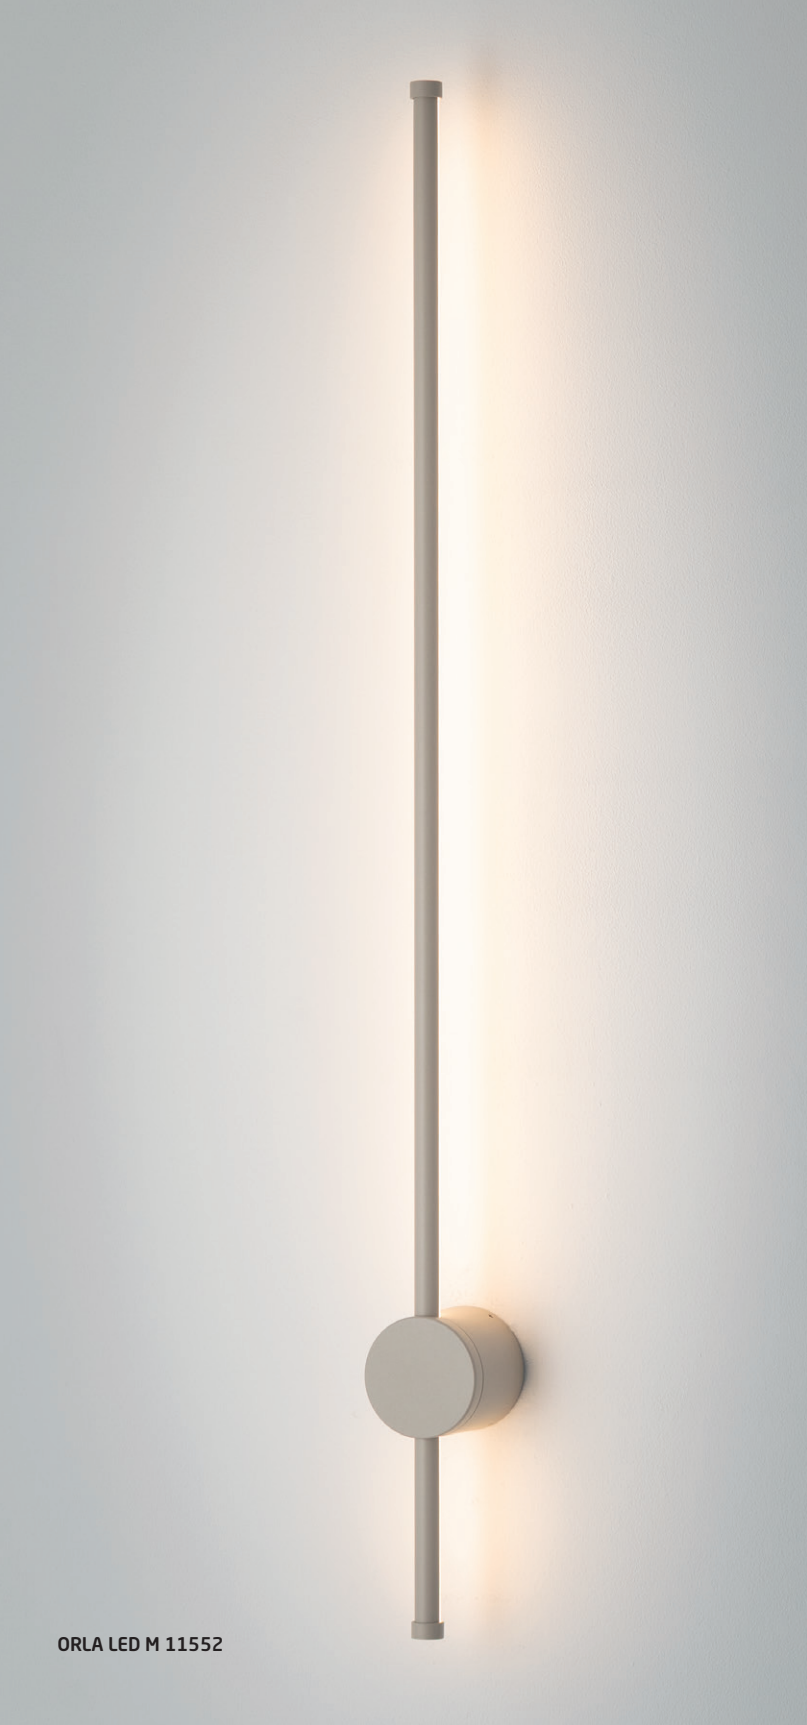


BLACK

Can be used in the bathroom

BLACK

SAND

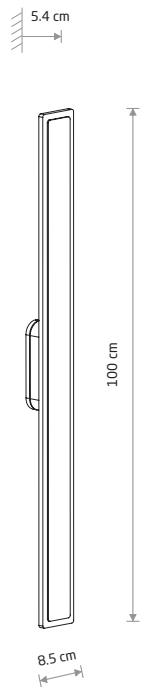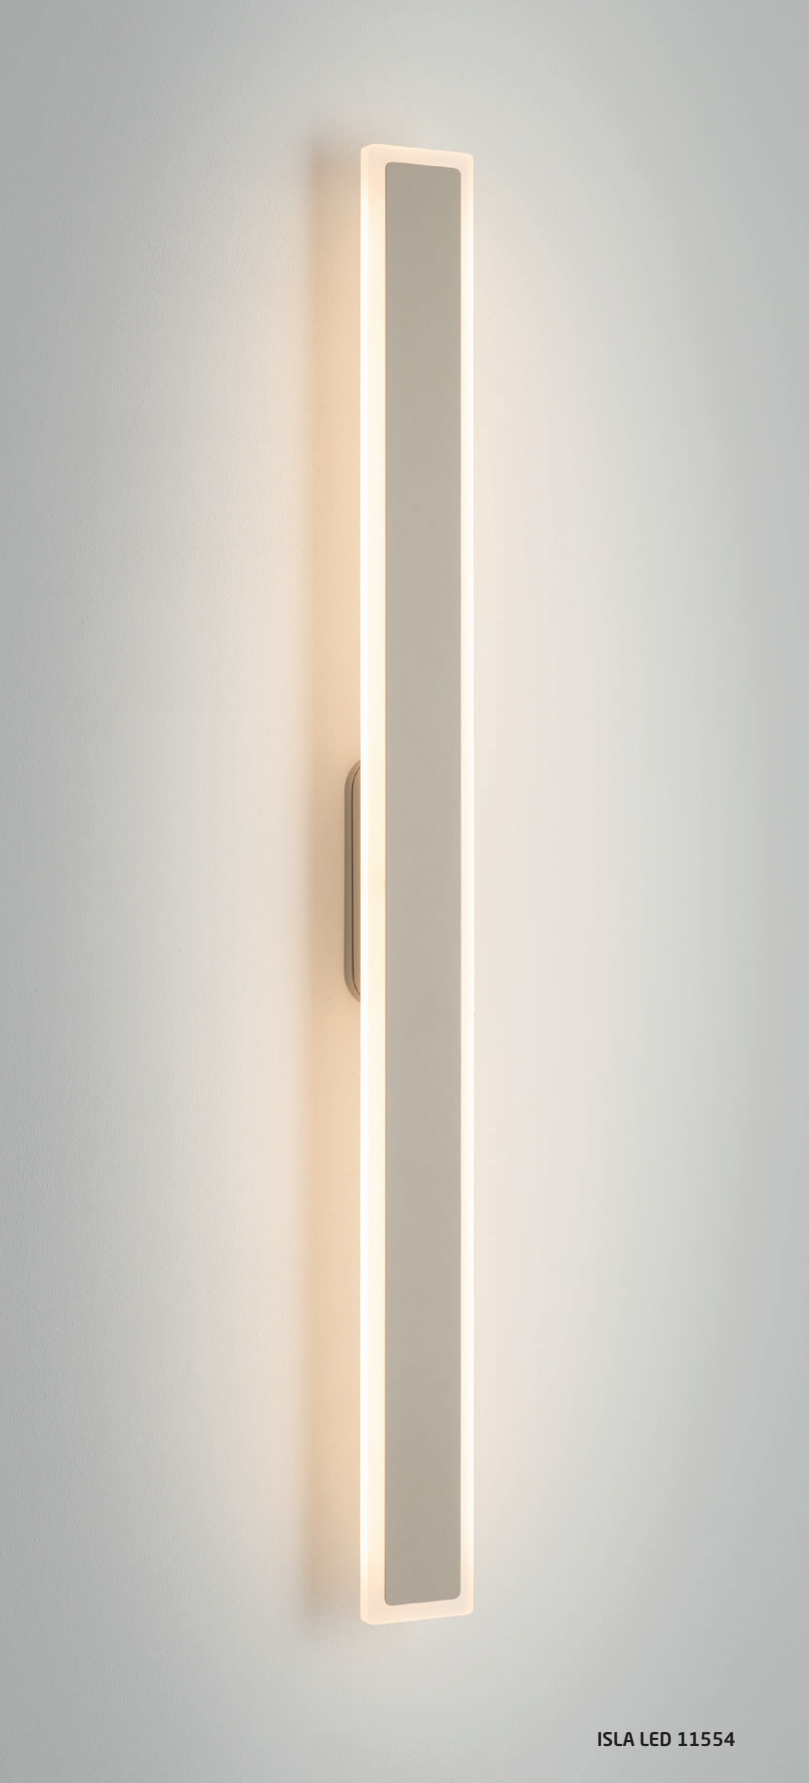


ISLA LED
painted aluminum, plastic PMMA

■ 11553 ■ 11554

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11553	22W LED	3000K	1200 lm	>90°	120	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11554	22W LED	3000K	1200 lm	>90°	120	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h


■ BLACK ■ SAND

Can be used in the bathroom

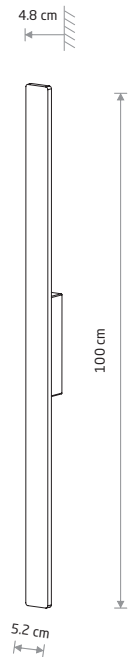

DEMI LED M
painted aluminum, plastic PC

■ 11555 ■ 11556 ■ 11557

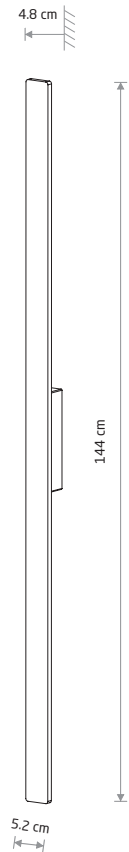

DEMI LED L
painted aluminum, plastic PC

■ 11558 ■ 11560 ■ 11561


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11555	18W LED	3000K	1200 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11556	18W LED	3000K	1200 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11557	18W LED	3000K	1200 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11558	24W LED	3000K	1500 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11560	24W LED	3000K	1500 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11561	24W LED	3000K	1500 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

Can be used in the bathroom




DEMI LED L 11560

■ BLACK ■ SAND ■ BRICK RED

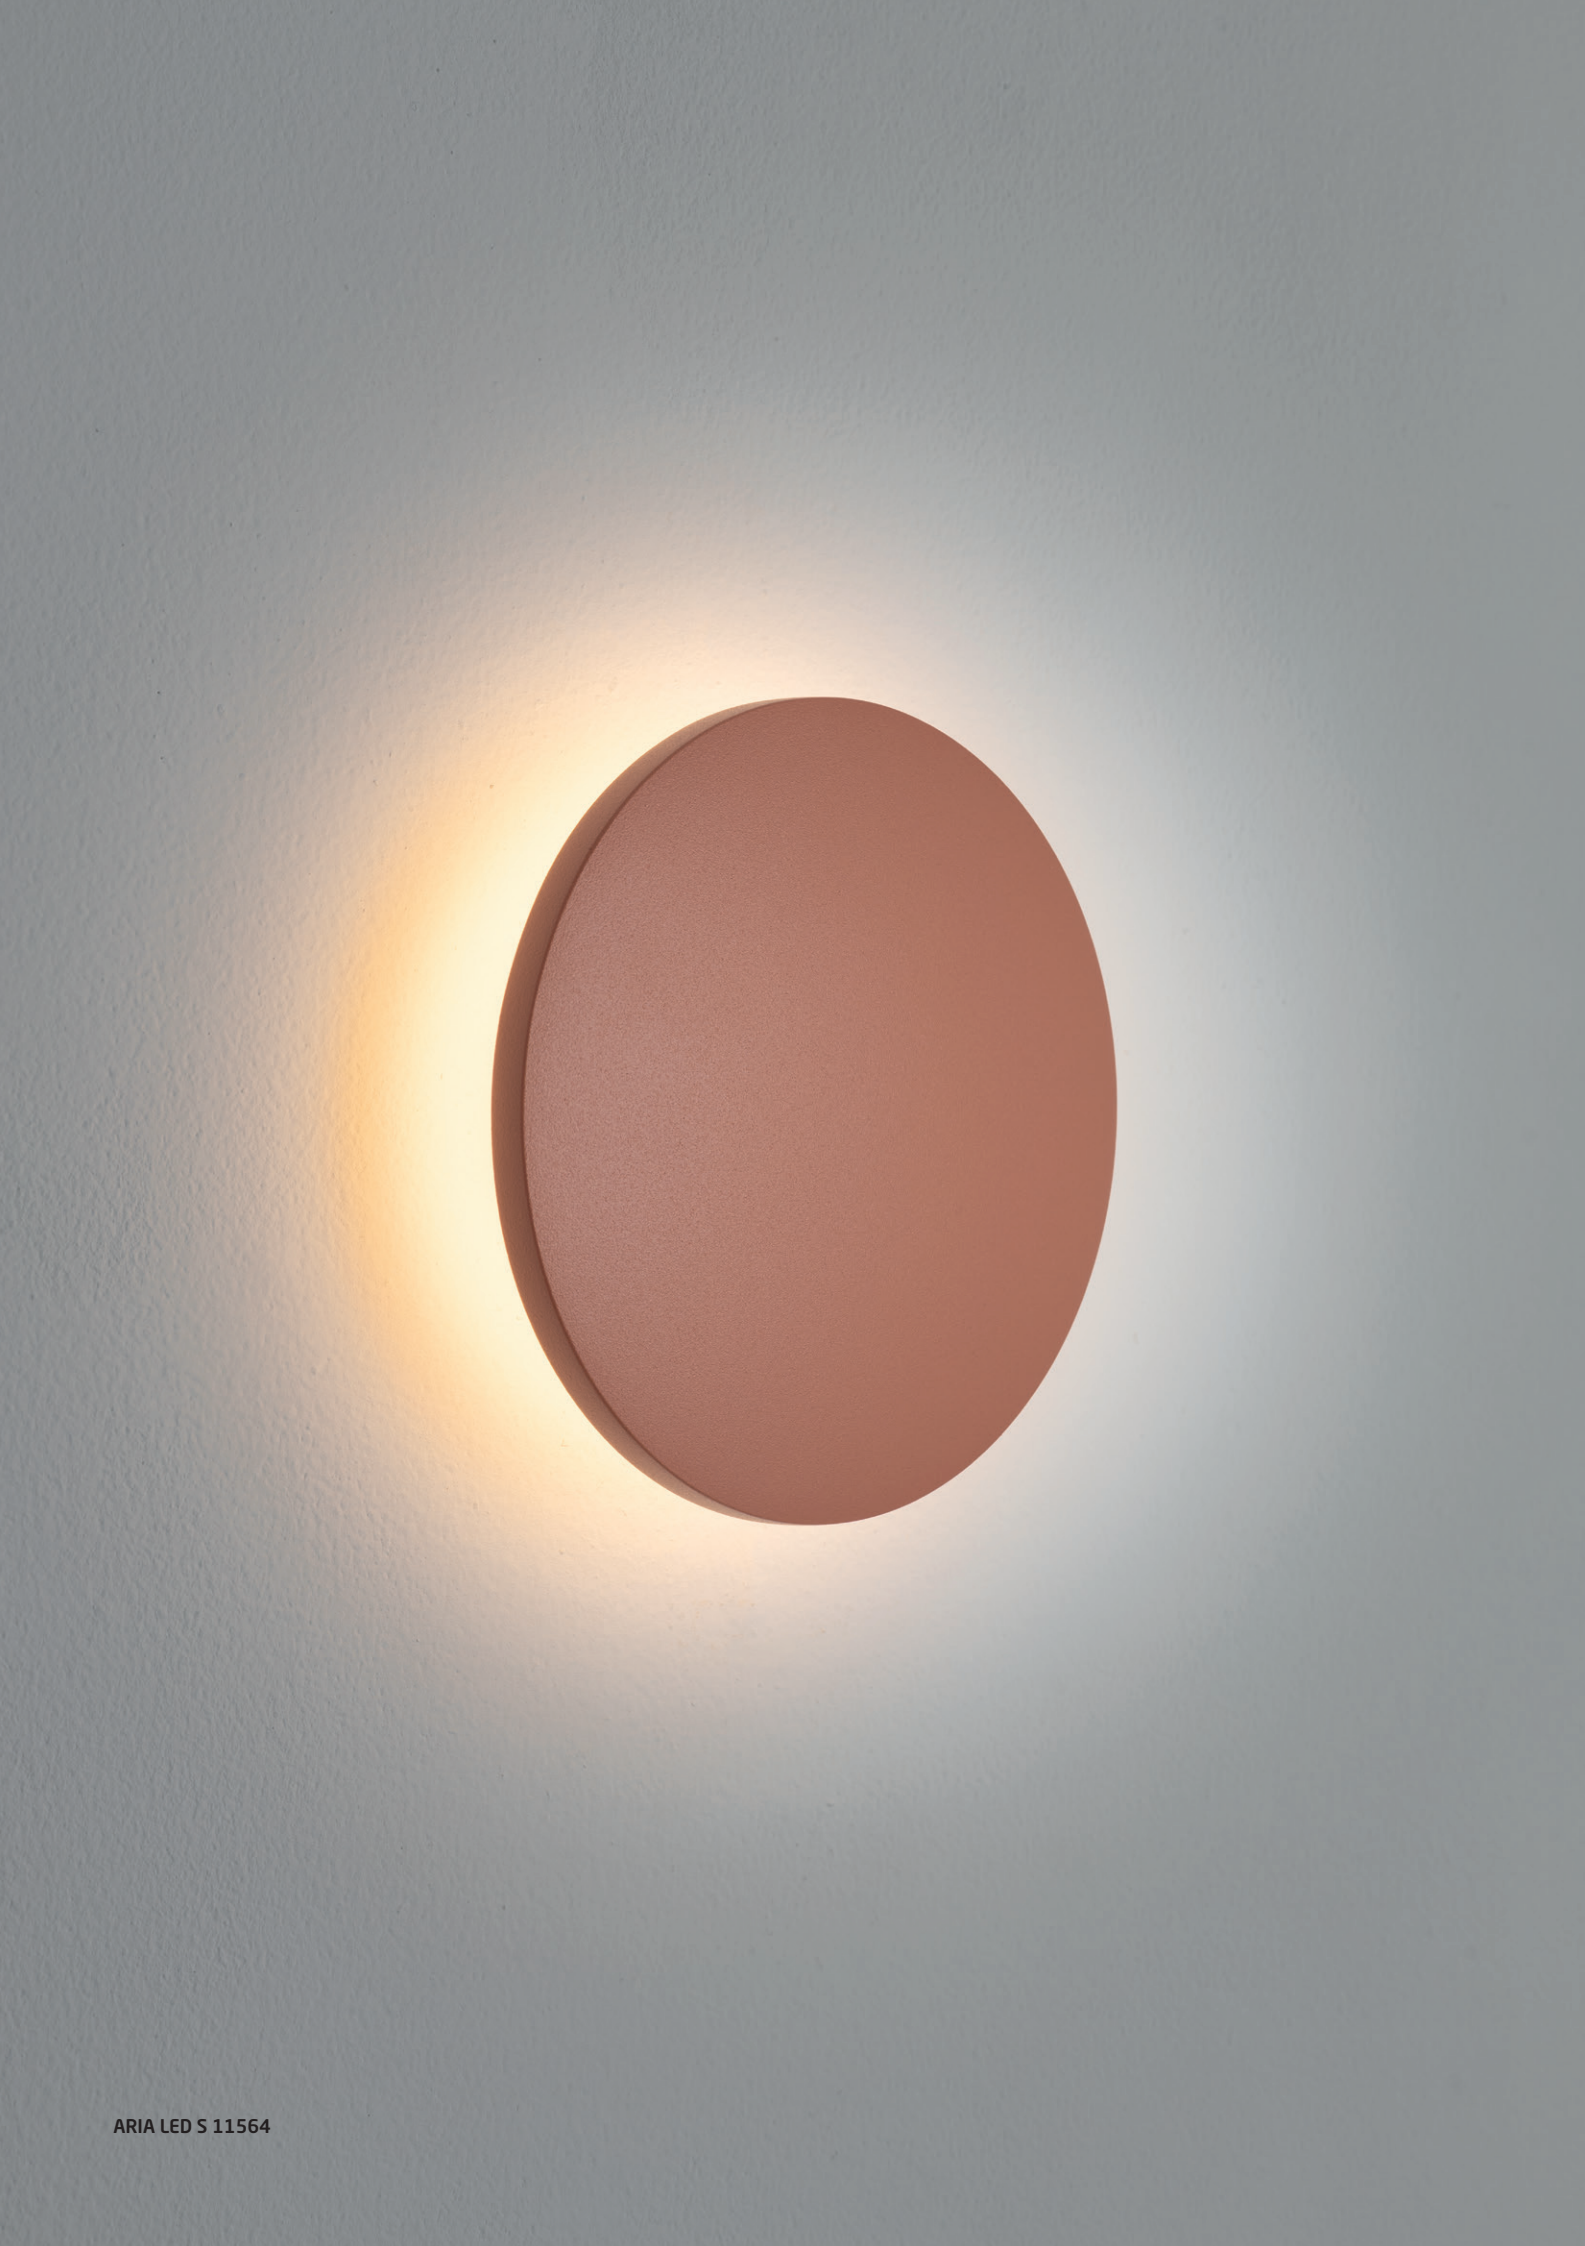

ARIA LED S 11564



ARIA LED S

painted aluminum, plastic PC


11562

11563

11564



ARIA LED M 11566




ARIA LED M

painted aluminum, plastic PC

11565

11566

11567




ARIA LED L

painted aluminum, plastic PC

11568

11570

11571



ARIA LED XL

painted aluminum, plastic PC

11572

11573

11574




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11562	6W LED	3000K	370 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11563	6W LED	3000K	370 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11564	6W LED	3000K	370 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11565	9W LED	3000K	540 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11566	9W LED	3000K	540 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11567	9W LED	3000K	540 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11568	12W LED	3000K	750 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11570	12W LED	3000K	750 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11571	12W LED	3000K	750 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11572	15W LED	3000K	1100 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11573	15W LED	3000K	1100 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11574	15W LED	3000K	1100 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

Can be used in the bathroom


BLACK

SAND

BRICK RED

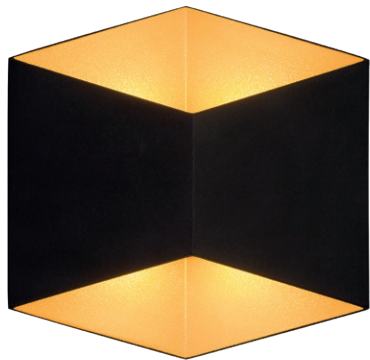


TRIANGLES LED 8141



TRIANGLES LED

painted aluminum, glass

8143
 8142
 8141




SEMI LED

painted aluminum, glass

6775
 11363
 11365




ELLIPSES LED 8182



ELLIPSES LED

painted aluminum, glass

8140
 8182



SEMI LED M

painted aluminum, glass

11364
 11366



SEMI LED M 11366

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8140	2x5W LED	3000K	800 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
8141	2x5W LED	3000K	750 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	> 0.5	IP54	10000h
8142	2x5W LED	3000K	700 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
8143	2x5W LED	3000K	800 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
8182	2x5W LED	3000K	700 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
6775	2x3W LED	3000K	242 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	8000h
11363	2x3W LED	3000K	300 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11364	2x5W LED	3000K	500 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11365	2x3W LED	3000K	300 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11366	2x5W LED	3000K	500 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h


WHITE
 BLACK-GOLD
 BLACK

Can be used in the bathroom

GRAPHITE
 BLACK
 BRASS



MARGOT 10504

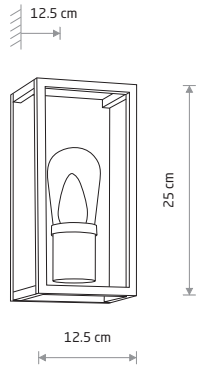

MARGOT
painted aluminum, glass

10504

1xE14, max 10W only LED


IP54



LENS LED 9112



MARGOT 10503

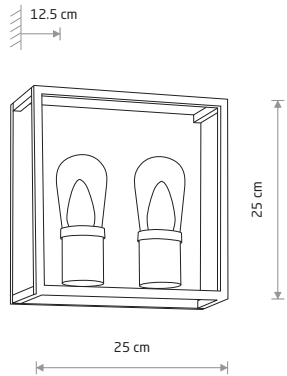


MARGOT
painted aluminum, glass

10503

2xE14, max 10W only LED

IP54

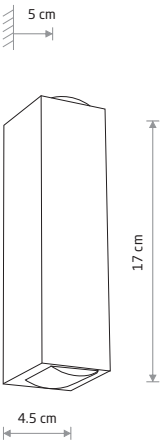

LENS LED
painted aluminum, glass

9112 9113



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9112	2x2W LED	3000K	40 lm	10°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
9113	2x2W LED	3000K	59 lm	10°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h


GRAPHITE

WHITE BLACK

LENS LED 9113



ASSOS 9123



ASSOS

■ painted aluminum, glass

■ 9123

■ 1xGU10 R50, max 10W only LED

IP54


ARRIS

■ painted aluminum, glass

■ 9516

■ 1xGU10 R50, max 10W only LED


IP54



ARRIS 9516



ASSOS 9124



ASSOS

■ painted aluminum, glass

■ 9124

■ 2xGU10 R50, max 10W only LED

IP54


NICO

■ painted aluminum, glass

■ 9518

■ 1xGU10 R50, max 10W only LED


IP54



NICO 9518



PRIMM 9551



PRIMM

■ painted aluminum, glass

■ 9551

■ 1xGU10 R50, max 10W only LED

IP54


NICO

■ painted aluminum, glass

■ 9517


■ 2xGU10 R50, max 10W only LED

IP54



NICO 9517

FOG 3403




FOG
painted aluminum, glass

3403

1xE27, max 25W only LED

IP44

FOG 3402




FOG
painted aluminum, glass

3402

1xE27, max 25W only LED

IP44

FOG 3404




FOG
painted aluminum, glass

3404

2xE27, max 25W only LED

IP44




NEGRO
painted aluminum, glass

4425

1xGU10 R50, max 10W only LED

IP54



EXE
painted aluminum, glass

8331

1xGU10 R50, max 10W only LED

IP54



EXE
painted aluminum, glass

8330

2xGU10 R50, max 10W only LED

IP54



NEGRO 4425




EXE 8331



EXE 8330



ROCK PRO 10687




ROCK PRO
painted aluminum, plastic PC

- 10687
- 1xE27, max 25W only LED
- IP44



ROCK PRO 10686




ROCK PRO
painted aluminum, plastic PC

- 10686
- 1xE27, max 25W only LED
- IP44



ROCK PRO 10688

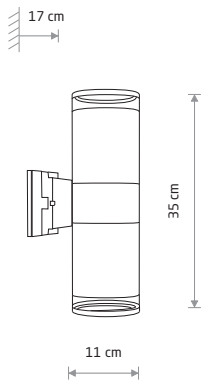


ROCK PRO
painted aluminum, plastic PC

- 10688
- 2xE27, max 25W only LED
- IP44



SIERRA 4422




SIERRA
painted aluminum, plastic PC

- 4422
- 2xE27, max 25W only LED
- IP54



HEXA 9565




HEXA
painted aluminum, glass

- 9564 9565
- 1xGU10 R50, max 10W only LED
- IP44



EDESA LED M 9108




EDESA LED M
painted aluminum, glass

- 9108 9107




EDESA LED S 9111



EDESA LED S
painted aluminum, glass

- 9111

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9107	7W LED	3000K	530 lm	19°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
9108	7W LED	3000K	530 lm	19°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
9111	3W LED	3000K	250 lm	30°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h





QUARTZ
painted aluminum, plastic PC

■ 3411

■ 1xE27, max 10W only LED

IP21

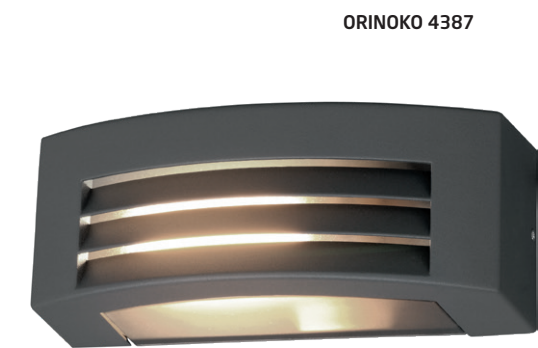

ORINOKO
painted aluminum, plastic PC


■ 4387

■ 1xE27, max 10W only LED

IP44

CABO LED
painted aluminum, plastic PC


■ 11804 ■ 11805

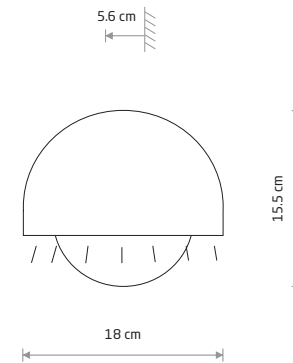

CABO LED 11804

UNIT LED
painted aluminum, glass

■ 9122



UNIT LED 9122


BRICK
painted aluminum, glass

■ 3408



■ 1xE27, max 25W only LED

IP65



BRICK 3408

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11804	10W LED	3000K	800 lm	120 °	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11805	10W LED	3000K	900 lm	120 °	>90	220/230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
9122	2x5W LED	3000K	727 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h




OSCAR 11347


OSCAR
painted aluminum

■ 11346 □ 11347

1xGU10 R50, max 15W only LED
IP54

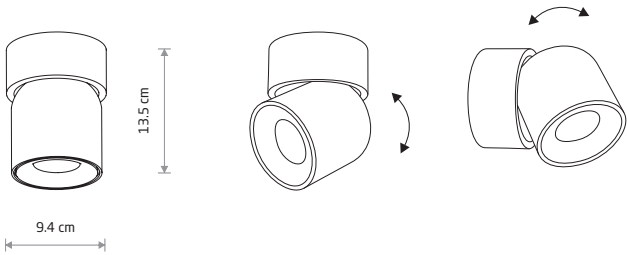


■ BLACK □ WHITE



KHUMBU
painted aluminum, glass
■ 4443
1xG9, max 10W only LED
IP44



KHUMBU 4443



MUNO LED
painted aluminum, glass
■ 6776




MUNO LED 6776

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
6776	6W LED	3000K	240 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	8000h

■ GRAPHITE




PICNIC LED 8177

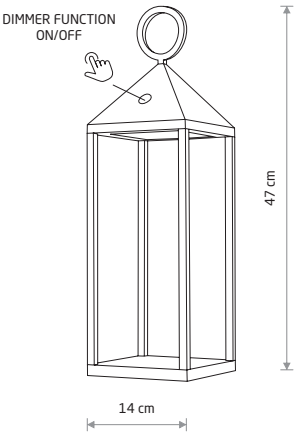

PICNIC LED
painted aluminum, plastic PC

8178 8177



HANGING SET
FOR PICNIC LED

aluminum, steel

8107 8106

Lampa bezprzewodowa, przenośna, zewnętrzna

- Podstawa ładująca w komplecie
- Akumulator litowy 2×2200 mAh
- Czas pełnego ładowania 5-8 h
- Czas pracy 12 h
- Włącznik dotykowy
- Ściemniacz

Wireless lamp, portable, outdoor


- Charging base (set incl.)
- 2×2200 mAh lithium battery
- Full charge time 5-8h
- Work time 12 h
- Touch switch
- Dimmable

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
8177	2.2W LED	3000K	155 lm	46°	≥84	~220-230 V, 50/60 Hz		IP54	30000h
8178	2.2W LED	3000K	155 lm	46°	≥84	~220-230 V, 50/60 Hz		IP54	30000h

WHITE GRAPHITE




PICNIC LED 8178

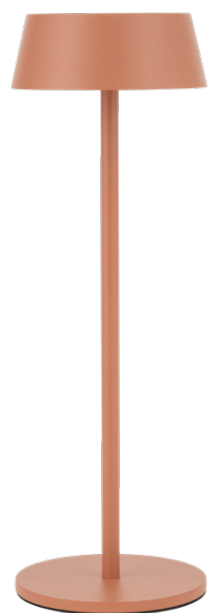


AMY LED 11534



AMY LED 11535

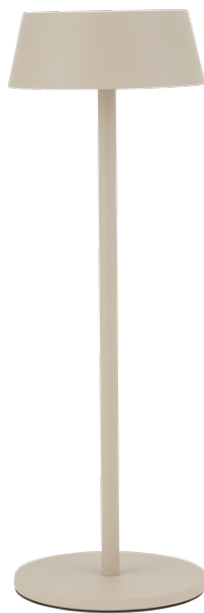

AMY LED 11533

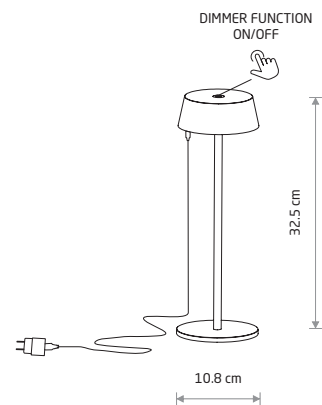

AMY LED

painted aluminum, plastic PC

- 11531

11532

11533
- 11534

11535



- Lampa bezprzewodowa, przenośna, zewnętrzna
- Ładowarka USB C (w zestawie)
 - Włącznik dotykowy
 - Ściemniacz 10-100%

- Wireless lamp, portable, outdoor
- Power adapter USB C (set incl.)
 - Touch switch
 - Dimmable 10-100%

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11531	2W LED	3000K	170 lm	45°	>80	5V	II	IP54	30000h
11532	2W LED	3000K	170 lm	45°	>80	5V	III	IP54	30000h
11533	2W LED	3000K	170 lm	45°	>80	5V	III	IP54	30000h
11534	2W LED	3000K	170 lm	45°	>80	5V	II	IP54	30000h
11535	2W LED	3000K	170 lm	45°	>80	5V	III	IP54	30000h

- WHITE

BLACK

SAND

BRICK RED

GREEN




AMY LED 11534



NALA LED 11536

- Lampa bezprzewodowa, przenośna, zewnętrzna
- Ładowarka USB C (w zestawie)
 - Włącznik dotykowy
 - Ściemniacz 10-100%

- Wireless lamp, portable, outdoor
- Power adapter USB C (set incl.)
 - Touch switch
 - Dimmable 10-100%

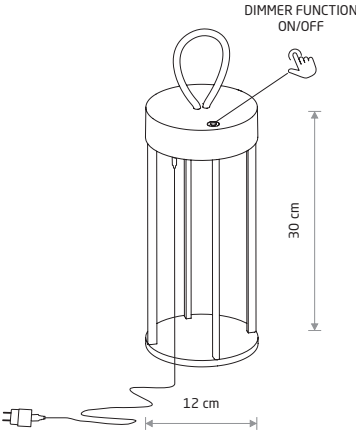

NALA LED
painted aluminum, plastic PC

11536 11537



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11536	4W LED	2700K	170 lm	45 °	>80	5V	⚡	IP54	30000h
11537	4W LED	2700K	170 lm	45 °	>80	5V	⚡	IP54	30000h

BLACK WHITE



MICRO USB

MAHE LED 8398



MAHE LED
painted aluminum, plastic PC

8397 8398




- Lampa bezprzewodowa, przenośna, zewnętrzna
- Ładowarka MICRO USB (w zestawie)
 - Czas pełnego ładowania 5-7 h
 - Czas pracy 9 h
 - Włącznik dotykowy
 - Ściemniacz


- Wireless lamp, portable, outdoor
- Power adapter MICRO USB (set incl.)
 - Full charge time 5-7 h
 - Work time 9 h
 - Touch switch
 - Dimmable

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
8397	2.2W LED	3000K	168 lm	46 °	≥ 84	~220-230 V, 50/60 Hz	⚡	IP54	25000h
8398	2.2W LED	3000K	168 lm	46 °	≥ 84	~220-230 V, 50/60 Hz	⚡	IP54	25000h


WHITE BLACK

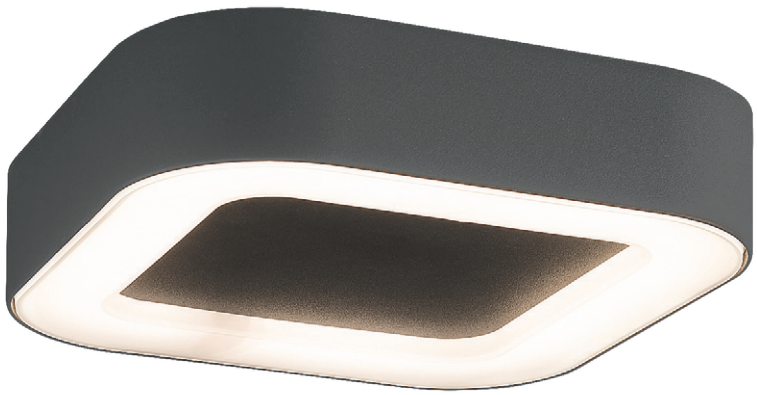


PUEBLA LED 9513

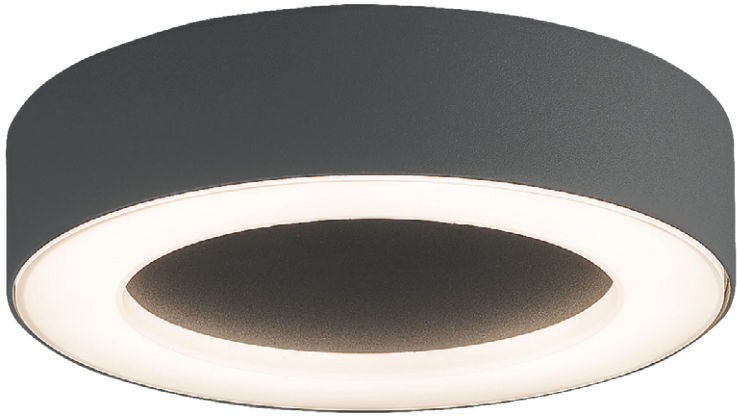

MERIDA LED 9514



PUEBLA LED
painted aluminum, plastic PC
9513



MERIDA LED
painted aluminum, plastic PC
9514


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9513	12W LED	3000K	540 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h
9514	12W LED	3000K	540 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h

GRAPHITE

Can be used in the bathroom




PIX LED 11367




PIX LED
painted aluminum, glass
11367

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11367	10W LED	3000K	500 lm	30°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h

BLACK




OUTLINE LED S
11360




OUTLINE LED S
painted aluminum, plastic PC

11360

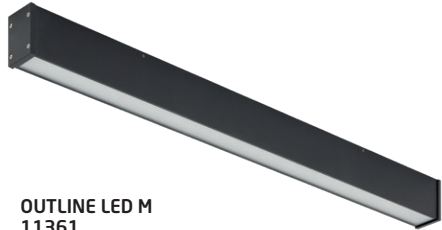


OUTLINE LED M
11361

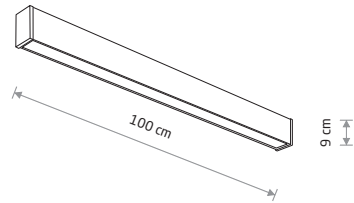


OUTLINE LED M
painted aluminum, plastic PC

11361

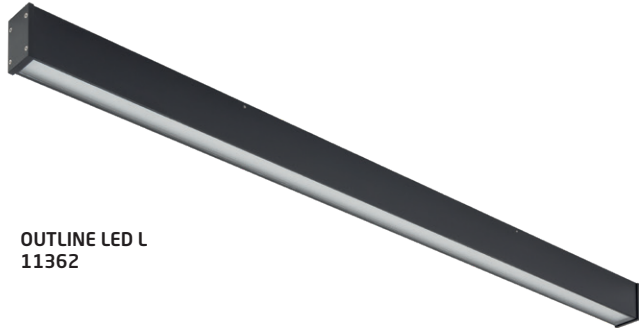

OUTLINE LED L
11362

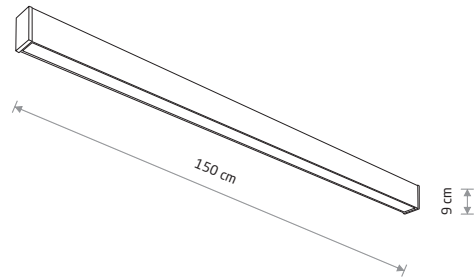

OUTLINE LED L
painted aluminum, plastic PC

11362



OUTLINE LED S 11360


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11360	20W LED	3000K	1200 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
11361	35W LED	3000K	1800 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
11362	50W LED	3000K	3000 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h



CLINE LED 11377



CLINE LED 11377




CLINE LED
painted aluminum, glass
11377



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11377	3W LED	3000K	130 lm	80 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h



ABBY LED 11528




ABBY LED
painted aluminum, plastic PC
11528



cut out ø 58 mm



AVA LED 11530



AVA LED
painted aluminum, plastic PC
11530



cut out ø 58 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11528	3W LED	3000K	10 lm	20 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11530	3W LED	3000K	40 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h



BAY LED 8164







BAY LED 8165



SIDEWALK SQUARE LED
8148



SIDEWALK ROUND LED
8147

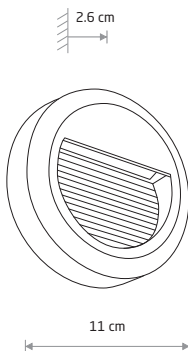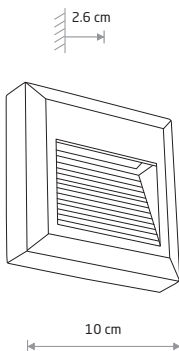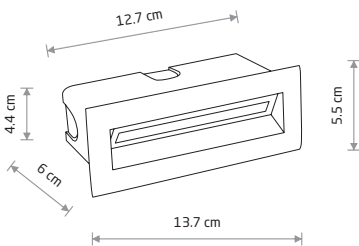

BAY LED

■ painted aluminum, plastic PC

■ 8164



BAY LED

■ painted aluminum, plastic PC

■ 8165



SIDEWALK SQUARE LED

■ painted aluminum, plastic PC

■ 8148



SIDEWALK ROUND LED

■ painted aluminum, plastic PC

■ 8147




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8164	3W LED	3000K	200 lm	70 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h
8165	5W LED	3000K	360 lm	70 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8147	3W LED	3000K	100 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
8148	3W LED	3000K	100 lm	120 °	≥80	~220-230V V, 50/60 Hz	⊕	>0.5	IP54	20000h



BASALT 3412




BASALT
painted aluminum, plastic

■ 3412
1x€14, max 10W only LED
IP44



ASSAM 4453




ASSAM
painted aluminum, glass, plastic

■ 4453
1xE27, max 10W only LED
IP65




INA 4907




INA
painted aluminum, glass, plastic

■ 4907
1xE27, max 10W only LED
IP65




STEP LED
painted aluminum, plastic

■ 6907 □ 6908



STEP LED 6907




OIA LED
painted aluminum, plastic

■ 9102 □ 9103



cut out ø 40 mm




OIA LED 9103

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9102 9103	2W LED	3000K	50 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	10000h
6907	3W LED	3000K	120 lm	92 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	10000h
6908	3W LED	3000K	190 lm	92 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	10000h



BUSH 3401



BUSH

■ painted aluminum, glass

■ 3401




● 1xGU10 R50, max 10W only LED

IP65



SPIKE LED S 9101




SPIKE LED S

■ painted aluminum, glass

■ 9101



SPIKE LED M 9100



SPIKE LED M

■ painted aluminum, glass, plastic

■ 9100




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9100	5W LED	3000K	300 lm	30 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
9101	5W LED	3000K	300 lm	30 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h

■ BLACK ■ GRAPHITE



RUMI LED 11543

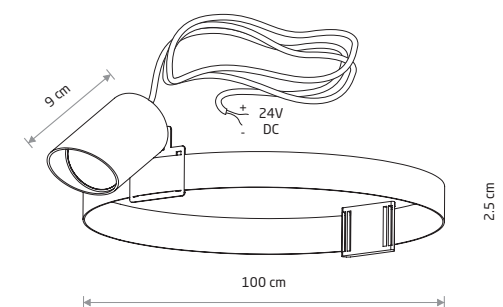

RUMI LED

■ painted aluminum, plastic PC

■ 11543



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11543	7W LED	3000K	320 lm	50 °	>90	24V	⚡	IP54	30000h

■ BLACK



PICCO LED S 9106



PICCO LED M 9105



PICCO LED L 9104

max 410 kg

4 cm

7 cm

PICCO LED S

aluminum

9106

cut out ø 38 mm

max 500 kg

11 cm

14 cm

PAOLI

steel, glass

9554

1xGU10 R50, max 10W only LED

cut out ø 100 mm

IP67

max 500 kg

6.7 cm

11.7 cm

MON LED

aluminum, glass

4454

cut out ø 64 mm

max 620 kg

6 cm

9 cm

PICCO LED M

aluminum

9105

cut out ø 55 mm

max 780 kg

7.5 cm

9.5 cm

PICCO LED L

aluminum

9104

cut out ø 65 mm

max 500 kg

6.2 cm

6 cm

7.2 cm

PAT LED

painted aluminum, plastic PC

8162

cut out ø 56 mm

max 500 kg

6.5 cm

6 cm

6.3 cm

CIRCLET LED

painted aluminum, plastic PC

8163

cut out ø 57 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9106	2W LED	3000K	60 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	Ⓢ	>0.5	IP67	10000h
9105	2W LED	3000K	80 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	Ⓢ	>0.5	IP67	10000h
9104	3W LED	3000K	200 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	Ⓢ	>0.5	IP67	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
4454	2W LED	3000K	100 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	Ⓢ	>0.5	IP67	10000h
8162	3W LED	3000K	12 lm	25 °	≥80	~220-230 V, 50/60 Hz	Ⓢ	>0.5	IP65	10000h
8163	3W LED	3000K	120 lm	50 °	≥80	~220-230 V, 50/60 Hz	Ⓢ	>0.5	IP65	10000h

ANA 10499

ANA 10500

ANA 10501

ANA 10502

AMELIA 10495

AMELIA 10496

AMELIA 10497

AMELIA 10498

ANA
painted aluminum, plastic PC

■ 10499

1xE27, max 10W only LED

IP44

ANA
painted aluminum, plastic PC

■ 10500

1xE27, max 10W only LED

IP44

ANA
painted aluminum, plastic PC

■ 10501

1xE27, max 10W only LED

IP44

ANA
painted aluminum, plastic PC

■ 10502

1xE27, max 10W only LED

IP44

AMELIA
painted aluminum, plastic PC

■ 10495

1xE27, max 10W only LED

IP44

AMELIA BL
painted aluminum, plastic PC

■ 10496

1xE27, max 10W only LED

IP44

AMELIA
painted aluminum, plastic PC

■ 10497

1xE27, max 10W only LED

IP44

AMELIA
painted aluminum, plastic PC

■ 10498

1xE27, max 10W only LED


IP44



AMUR 4692



TAY 5292

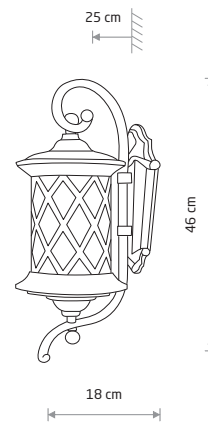

LANTERN


painting aluminum, plastic PC

■ 6911

■ 1xE27, max 25W only LED
IP23



LANTERN 6911




AMUR

painting aluminum, glass

■ 4692

■ 1xE27, max 25W only LED
IP23




TAY

painting aluminum, glass

■ 5292

■ 1xE27, max 25W only LED
IP23

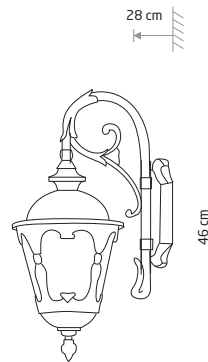

TYBR


painting aluminum, glass

■ 4686

■ 1xE27, max 25W only LED
IP44



TYBR 4686

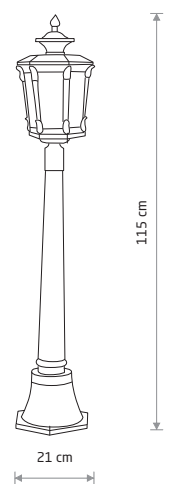


AMUR

painting aluminum, glass

■ 4694

■ 1xE27, max 25W only LED
IP44

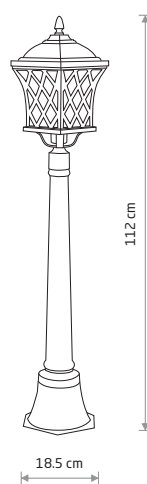


TAY

painting aluminum, glass

■ 5294

■ 1xE27, max 25W only LED
IP23



DON

painting aluminum, glass

■ 4687


■ 1xE27, max 25W only LED
IP44




DON 4687



NOOK 7976




NOOK
plastic ABS, plastic PC
7972 7976 7978
1xE27, max 10W only LED
IP44



TAHOE II
plastic PC, plastic ABS
10035 10037 10038
2xE27, max 15W only LED
IP44



TAHOE II 10038

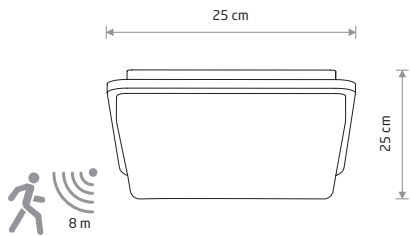

TAHOE SENSOR
plastic PC, plastic ABS
10040
2xE27, max 15W only LED
IP44




TAHOE SENSOR 10040




FESTOON LIGHTS 9 M 7872

FESTOON LIGHTS 6 M 7873

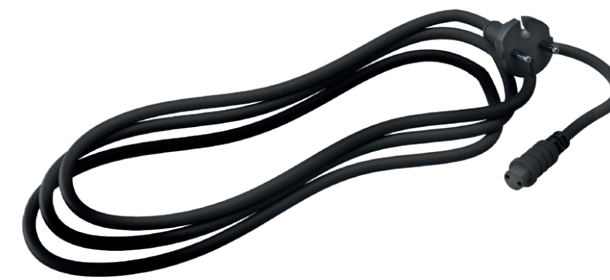


MAX 2000W MAX 80m CONNECTABLE

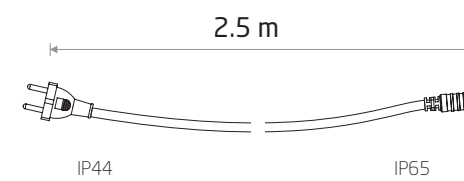

POWER CORD FOR
FESTOON LIGHTS
rubber cable

■ 7871
IP65

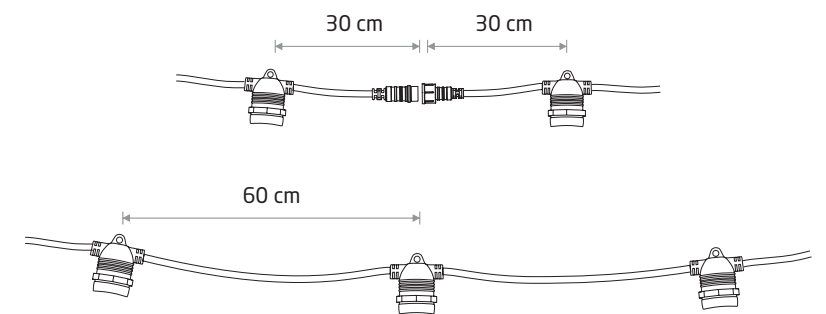

FESTOON LIGHTS 6M
rubber cable

■ 7873
● 10xE27, max 15W
IP65

FESTOON LIGHTS 9M
rubber cable

■ 7872
● 15xE27, max 15W
IP65



5 PC SET

BULB LED E27, A60 2W,
5 PC SET

glass
7487



Nowodvorski
LIGHTING



Nowodvorski Lighting sp. z o.o.
ul. Bojemskiego 11
42-202 Częstochowa
POLAND



+48 34 344 91 10 / 11



nowodvorski@nowodvorski.com



www.nowodvorski.com

